

N610

PROFILE

N610 All-in-One thin client is the perfect replacement of PC plus monitor solution adopting high performance Intel processor, big 18.5" LCD screen and elegant design.

FEATURES


- **Professional operating system**
secure and reliable, simple and easy to use
- **VDI Support**
Support Citrix, VMware and Microsoft virtualization solutions and offers smooth user experience
- **Leading the All-in-One Trend**
With the compact and stylish appearance, greatly saves users' space, leads the All-in-One Trend.
- **Varied Peripherals**
6 USB ports, 1 serial port and 1 parallel port, compatible with lots of peripherals



Connectivity



1 2 3 4 5 6 7 8

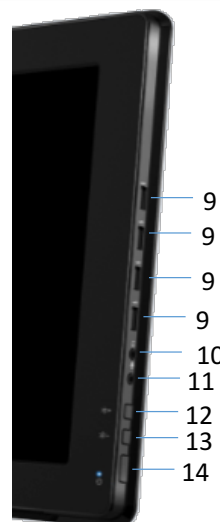

9
9
9
9
10
11
12
13
14

1. DC 19V input
2. PS/2 Mouse
3. PS/2 Keyboard
4. Parallel Port
5. Serial Port
6. Kensington Lock hole
7. RJ-45
8. USB 3.0 Ports
9. USB 2.0 Ports
10. Line-out
11. Mic-in
12. Brightness Up
13. Brightness Down
14. Power Button

SPECIFICATION

SYSTEM

Processor Intel dual-core 2.41Hz or Intel quad-core 2.0GHz

Available Operating System WES 7 / WES 8 / Win 10 IOT

Management CCCM

MEMORY

RAM (DDR3L) 2GB (Max up to 8GB)

Storage (SSD) 8GB MSATA (up to 128GB or optional HDD)

DISPLAY

Screen 18.5"

Resolution 1366 x 768, VGA (optional) up to 2560 x1600

NETWORK

LAN x 2 (10/100/1000 Base-T Fast Ethernet, RJ-45)

WLAN Optional Mini PCI-E wireless

I/O PERIPHERAL INTERFACE

USB Port x 6 (side: USB 2.0 x 4, rear: USB 3.0 x 2)

RJ-45 x 2

PS/2 Port x 2

Parallel Port x 1

Serial Port x 1 (extensible to 4 via cable)

CAMERA

Camera Optional, 2-megapixel embedded camera

AUDIO

Port Mic-in x 1, Line-out x 1

DIMENSION

Device (including stand) 385mm x 485.2mm x 206mm

Packaging 574mm x 226mm x 464mm

Net Weight 5.51kg

POWER

Adapter Worldwide auto-sensing 100-240V AC, 50/60 Hz, 12V/5A DC

Power Consumption 20.52w

MOUNTING

Stand Vertical feet standard

Security Standard Kensington anti-theft keyhole

ENVIRONMENT

Cooling Fan-less Convection

Operation Temperature 0°C to 40°C

Relative Humidity 30% to 90% non-condensing